

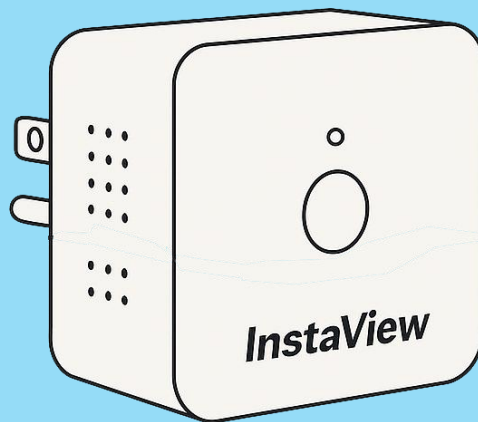


InstaView Wireless Mailbox Alert Systems Installation Guide For **Android**

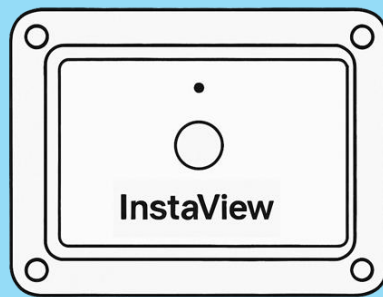

If you need assistance, you can contact support at
support@wirelessinput.com. Please allow 24 to 48 hours for a response.

Items Contained in the Packaging

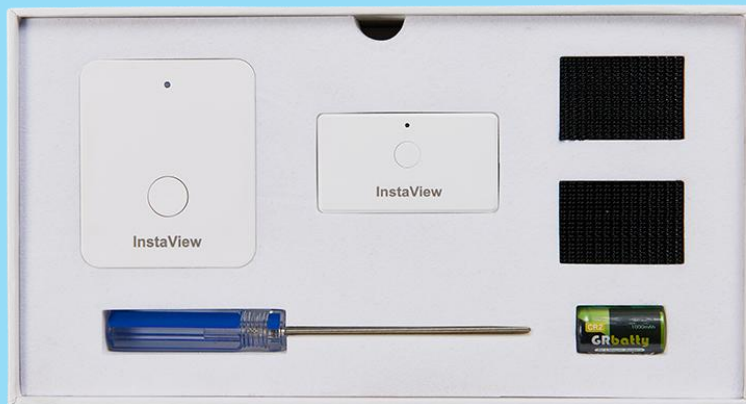


1. Plug the Gateway (with built-in siren) into a wall outlet or a socket




- 2.** Use the included screwdriver to open the sensor's battery cover, and install the included battery.

Make sure that the rubber band is adjusted around the cover to make the sensor waterproof.

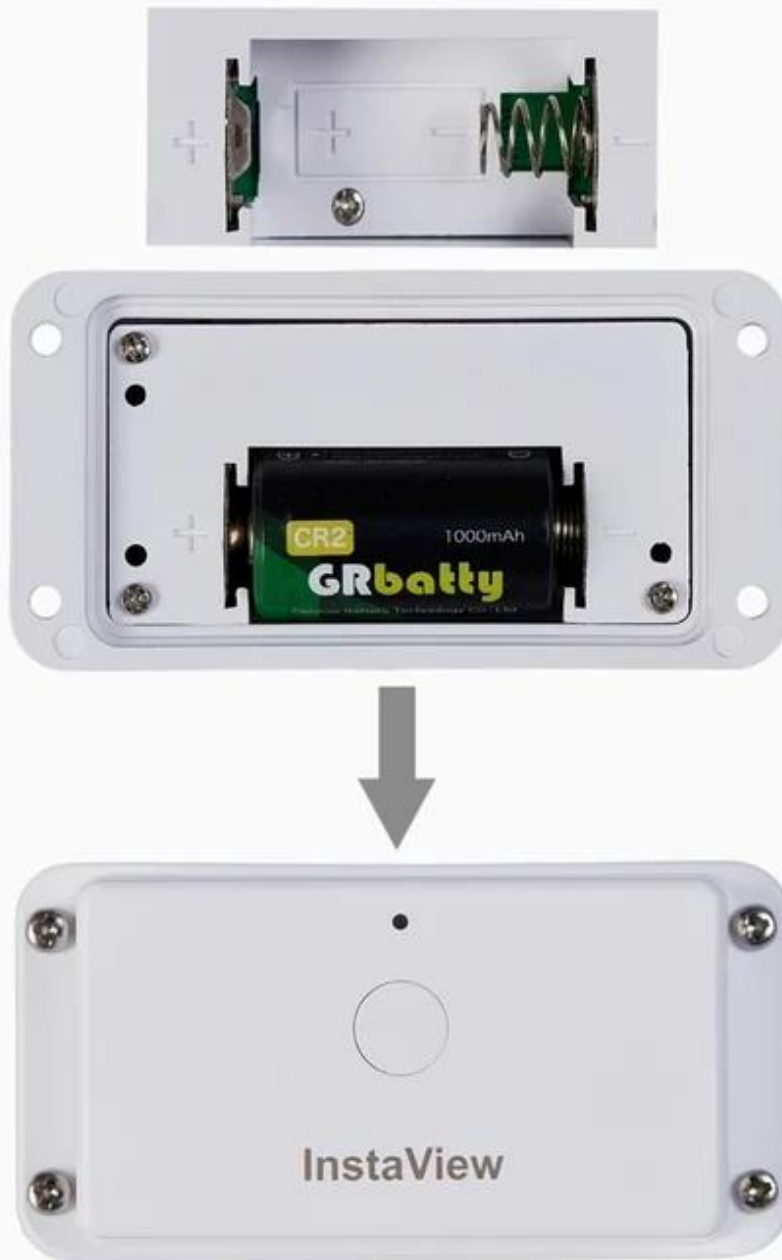

3. Turn on Wi-Fi and Bluetooth in the Settings of your Android phone.

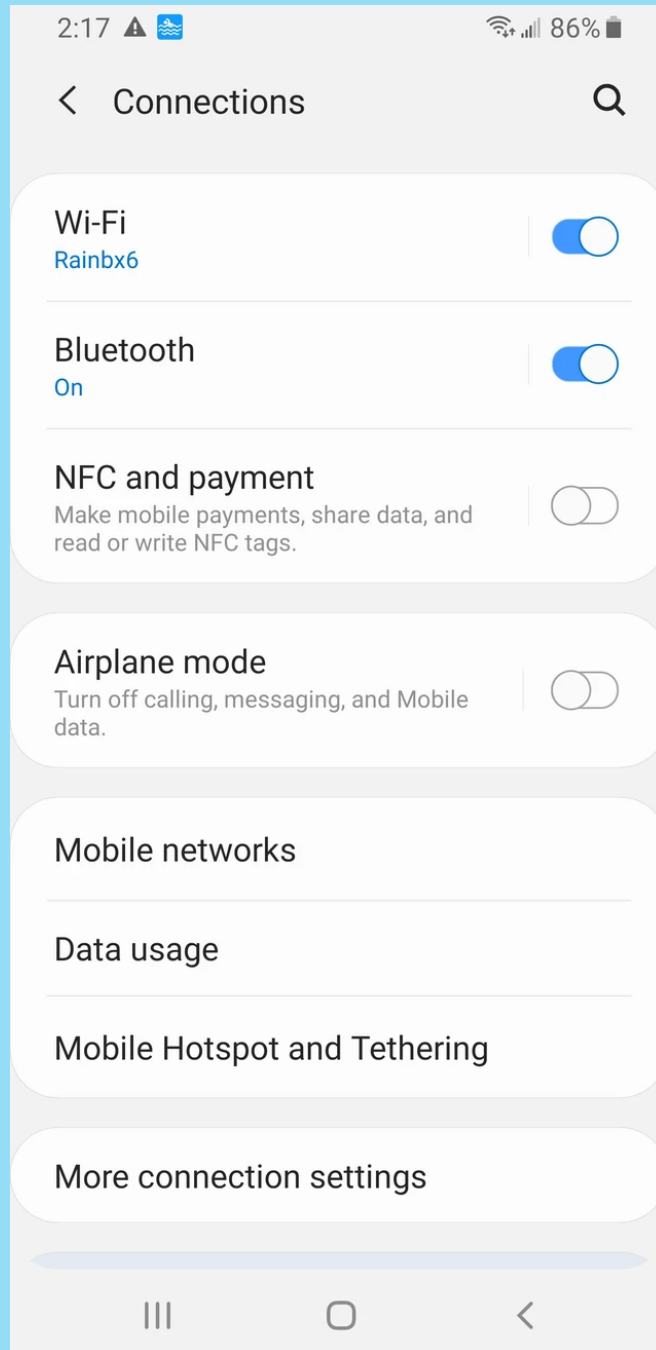

4. Use the Android phone's camera to scan the right QR code on the back of the package,

then tap the link on the screen to enter the Apple app store to download the app
(see next page), or search for “Instaviewsafe” app in App store directly

InstaView Wireless Mailbox Alert System

- Power: CR2 battery x 1 (included)
- Water resistant
- Receive an audible alert on the indoor receiver and a push notification on your iPhone or Android device when the mailbox is opened
- Monitor your mailbox remotely with an iOS or Android app, anytime, anywhere
- Download the app and follow the in-app guidelines to set it up
- Customer service contact: support@wirelessinput.com



Scan to download the iOS App



Scan to download the Android App



InstaView App

InstaView wireless mailbox alert system

Model: IVMN1




8 50036 33041 7

Made In China




5. Download the app from Apple app store

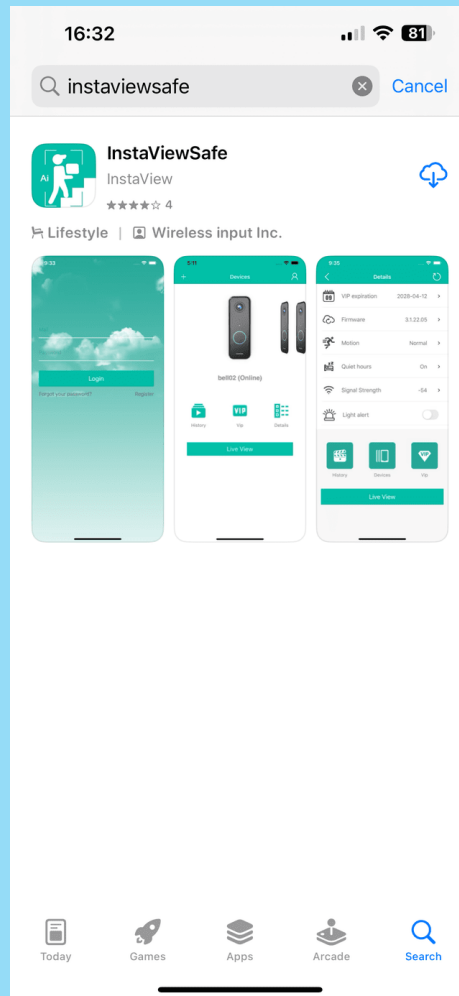

6. Open the app and grant permission to use your location while using it,

as this is necessary for accurate notification time.

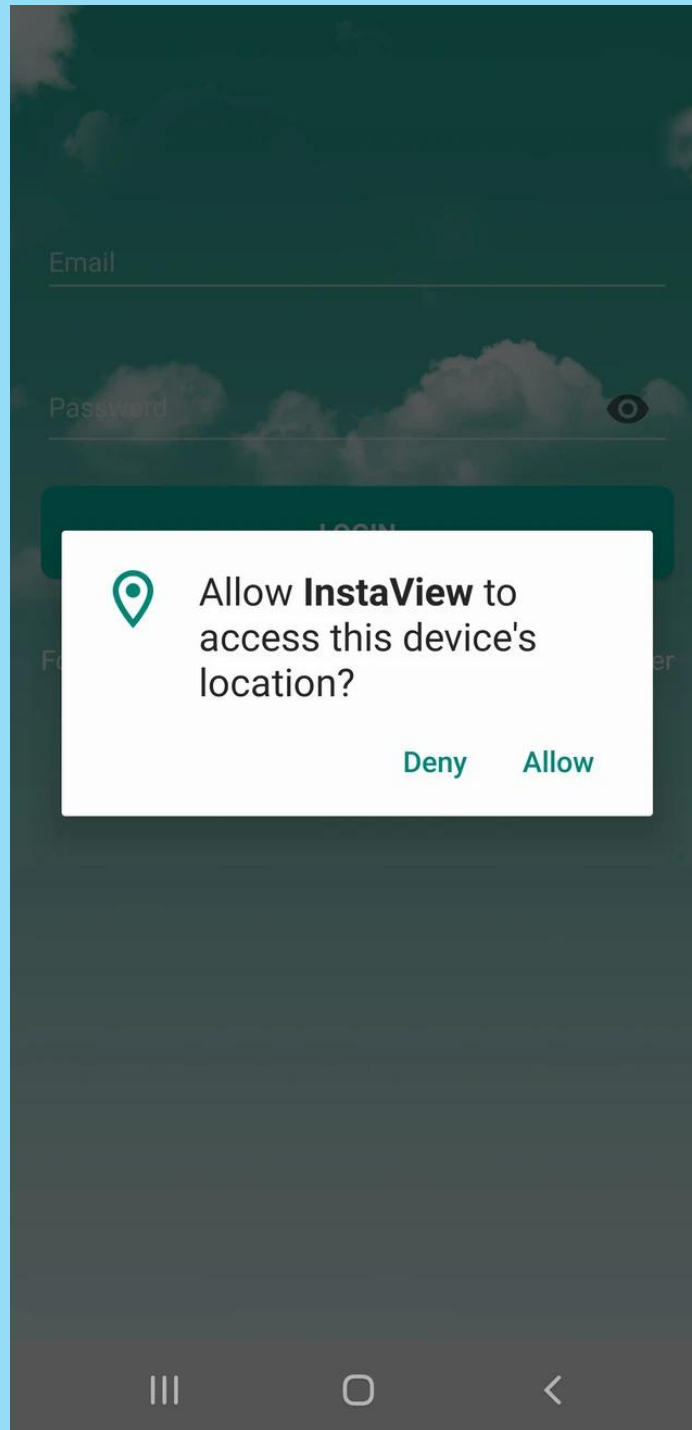

Please grant permission to access files so the app can record the mailbox opening history.

Email

Password



LOGIN



Allow **InstaView** to
access photos, media,
and files on your device?

Deny

Allow



Email

Password



LOGIN




Allow **InstaView** to
record audio?

Deny

Allow





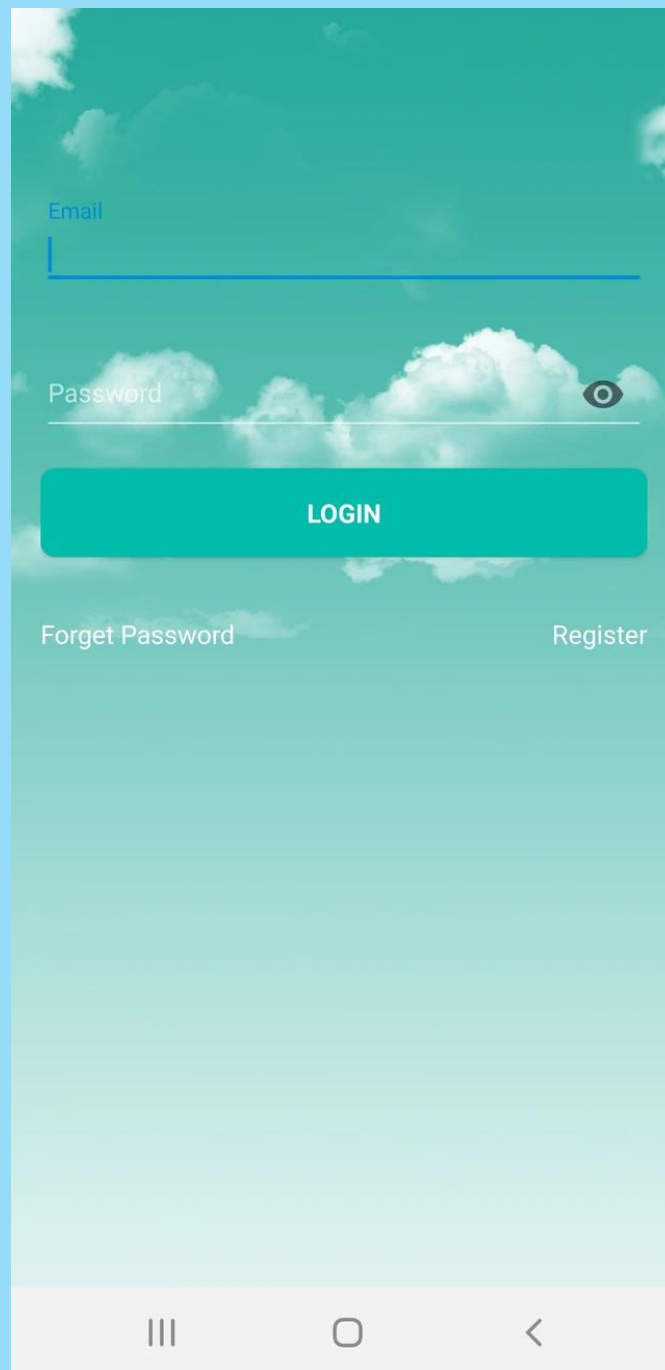

7. If you don't have an account, tap "Register" to register by following the on-screen instructions.



The image shows a mobile application login screen. The background is a teal gradient with white clouds. At the top, there is a label "Email" in blue text above a blue horizontal input field. Below this is a label "Password" in white text above a white horizontal input field. To the right of the password field is a black eye icon for toggling visibility. Below the password field is a large teal button with the word "LOGIN" in white capital letters. At the bottom of the form area, there are two links: "Forget Password" on the left and "Register" on the right, both in white text. At the very bottom of the screen is a white bar containing three Android navigation icons: a square, a circle, and a triangle.

8. Enter your name and phone number

10:11    86%

 CREATE ACCOUNT

To begin registration, please enter your name and mobile number.




First Name

Last Name




+1 ▼


Mobile

CONTINUE

9. Enter your email address




10:21    83%

 CREATE ACCOUNT




Enter your email address to register an account.


Please enter email address

CONTINUE


  


10. Enter a password

10:31    81%

 CREATE ACCOUNT




Enter a password you want to use for this account:

Password 

Re-enter password 

Your password must be at least 8 characters, include one upper-case letter, one lower-case letter, one number, and one special character.

CONTINUE

11. Enter the verification code sent to your registered email

Please note: If you cannot receive the verification code, it is recommended that you use a different person's email address (such as a Gmail or Yahoo Mail account).

10:34

80%



CREATE ACCOUNT

We sent a verification code to this email address:
contact@wirelessinput.com

If you still don't see it, check your spam folder.

Please enter verification code


CREATE ACCOUNT




12. Your account has been created; you can now add a device to the app by tapping the “+” sign




13. To add the Instaview mailbox gateway which was plugged into an outlet from step 1, select Gateway from the list of devices and press “Add Gateway”

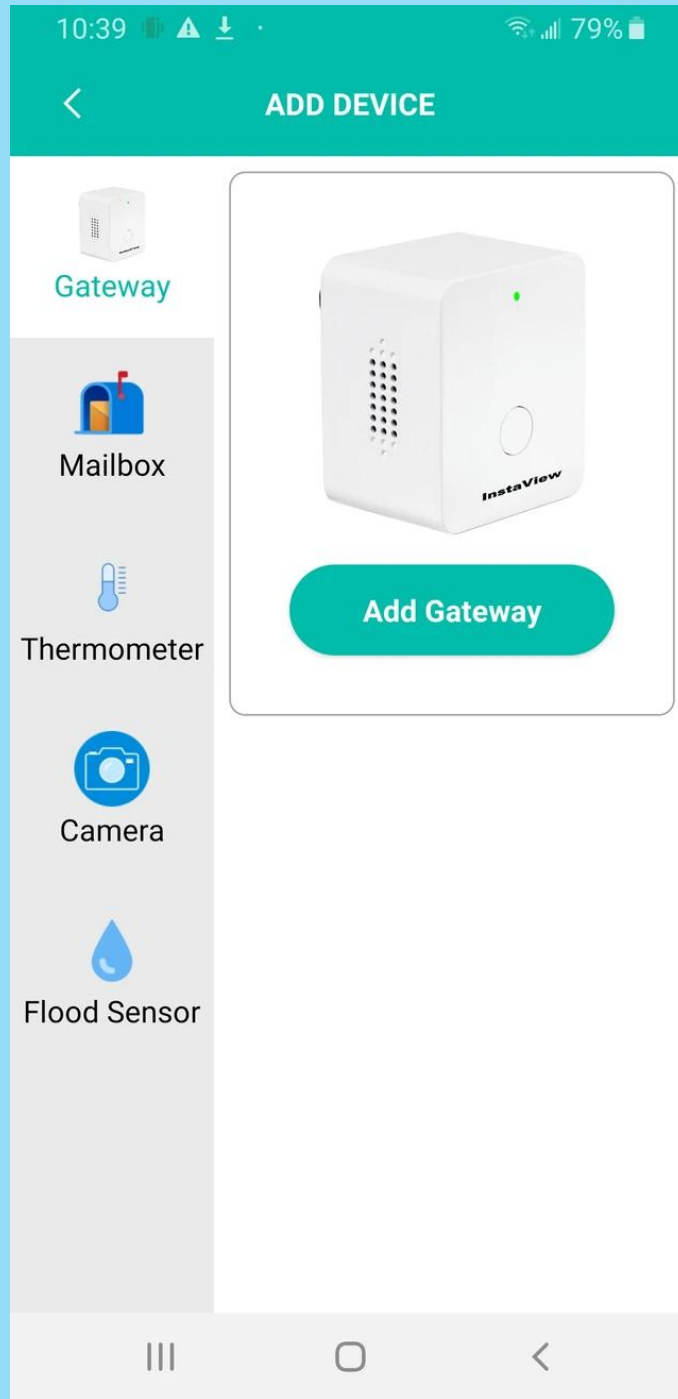


14. Press “Yes” if the light on the gateway is flashing

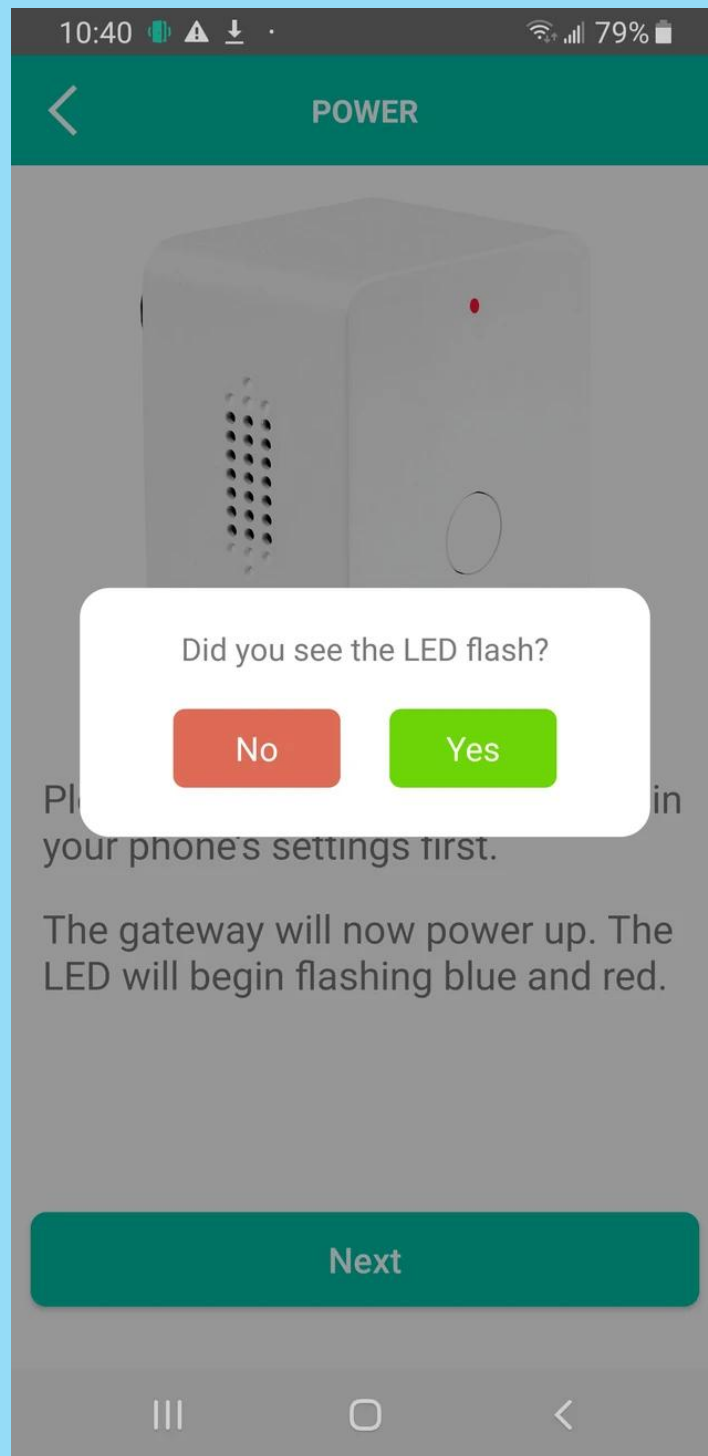

15. Choose a name or give your gateway a custom name

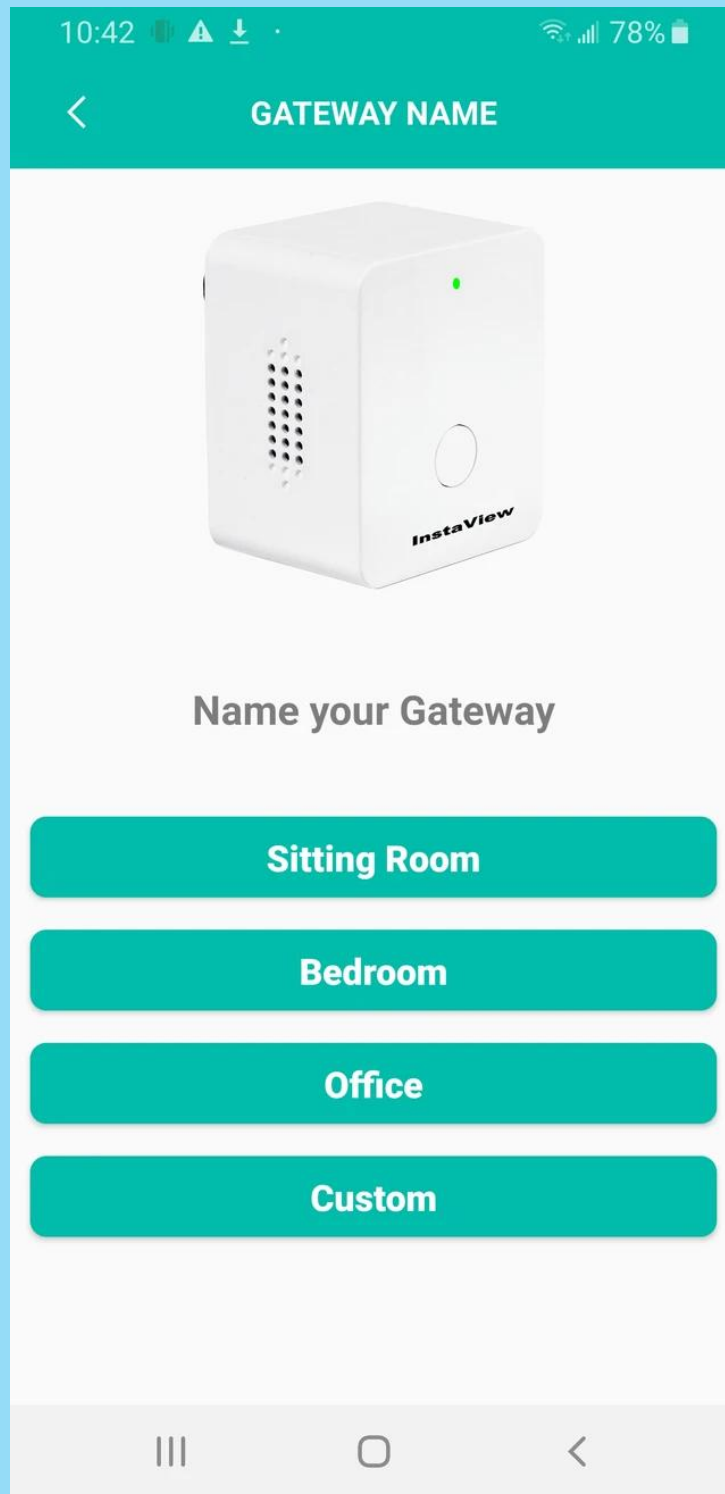


16. Allow the app to make changes to your system settings to complete the setup

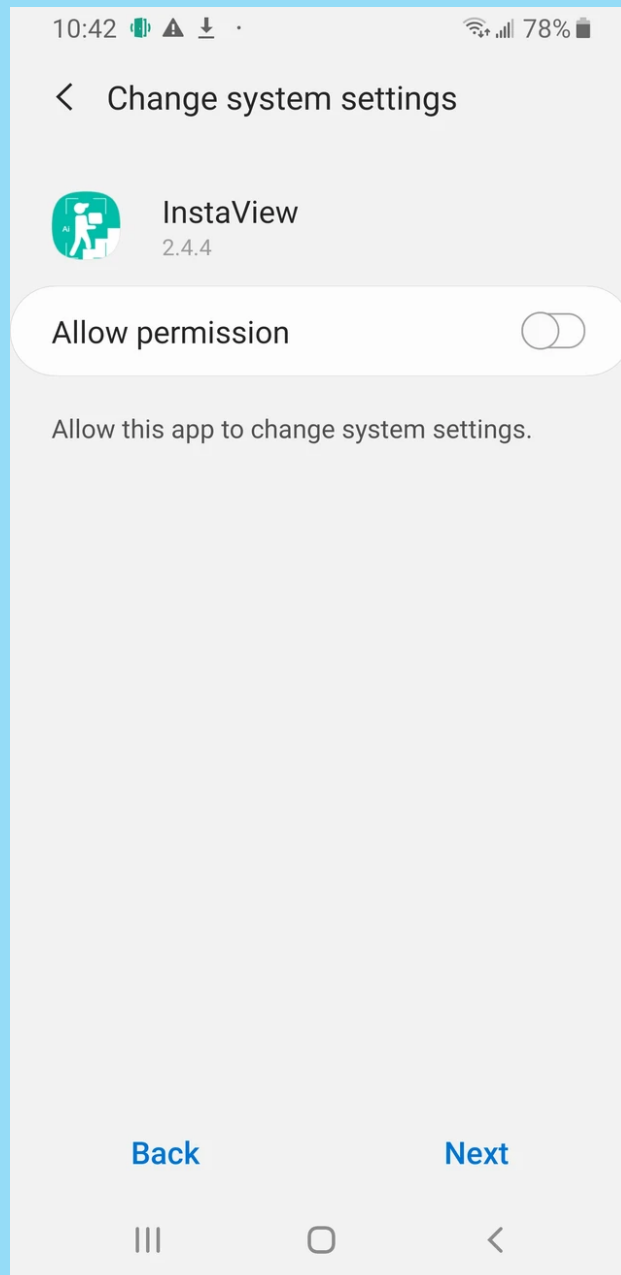


17. Enter your home Wi-Fi's name and password (usually on your router)


to connect the gateway to your home Wi-Fi network

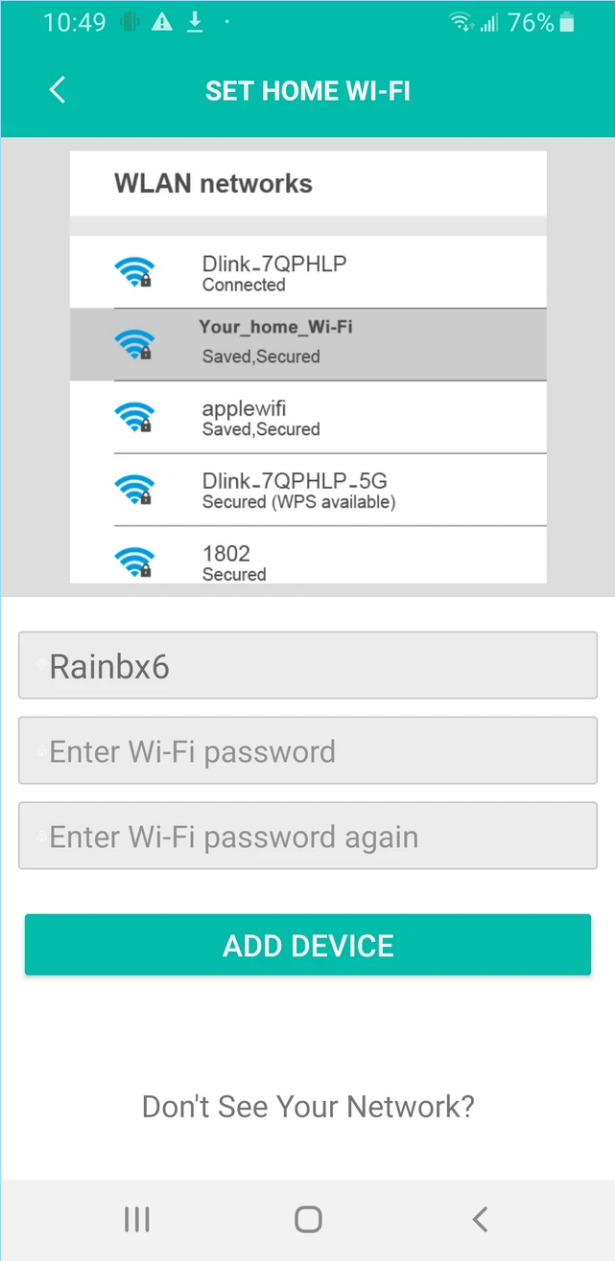


18. Gateway has been added.

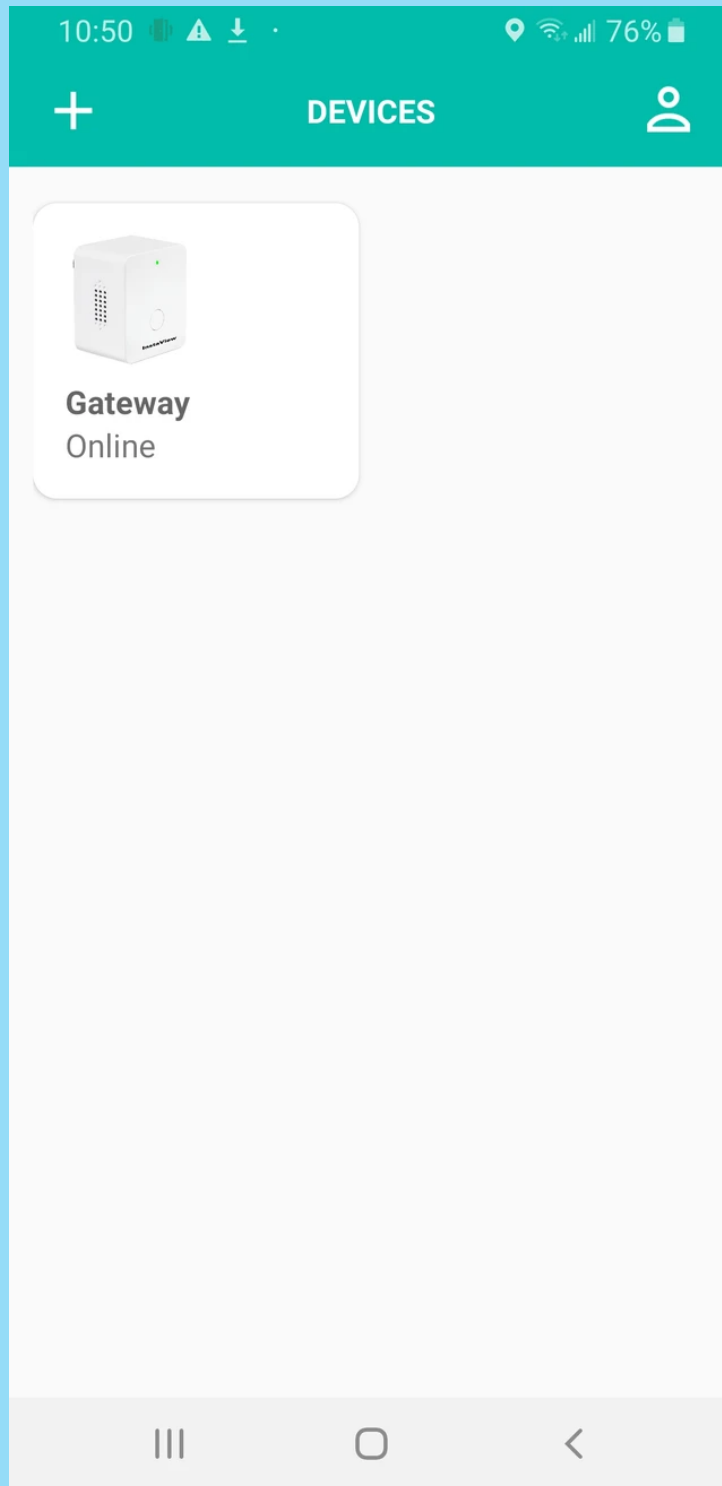

19. Now, you can tap the "+" sign on the "Devices" screen to add the mailbox sensor.

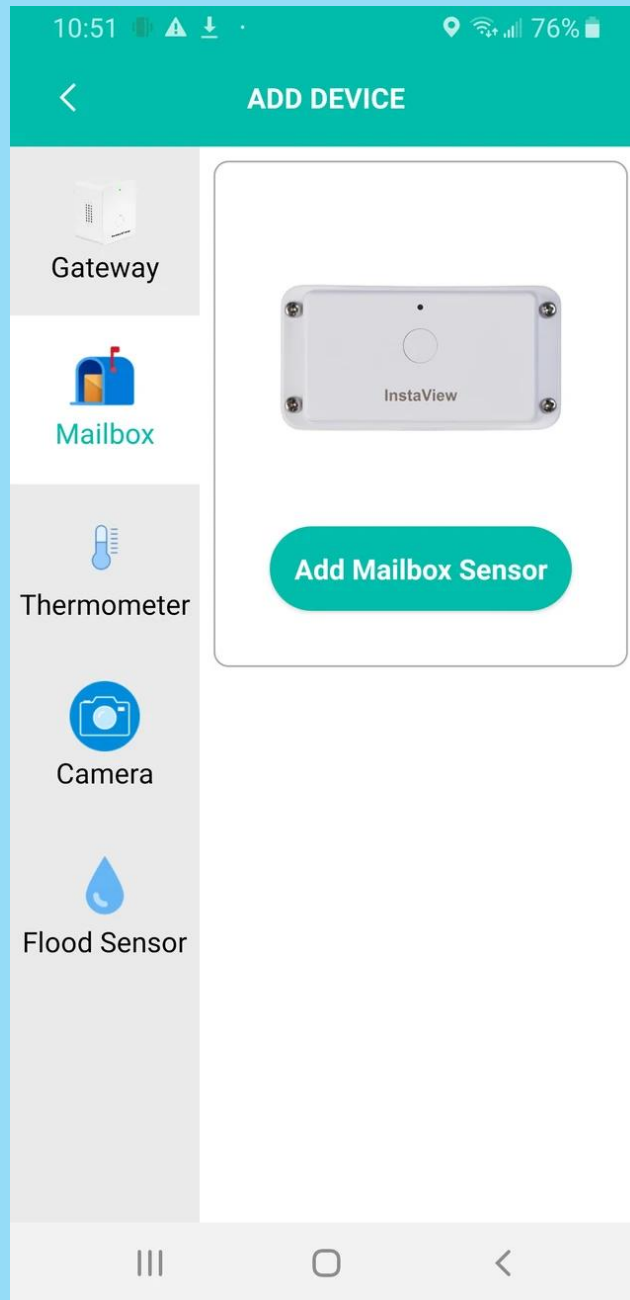


20. Select the gateway you just added.

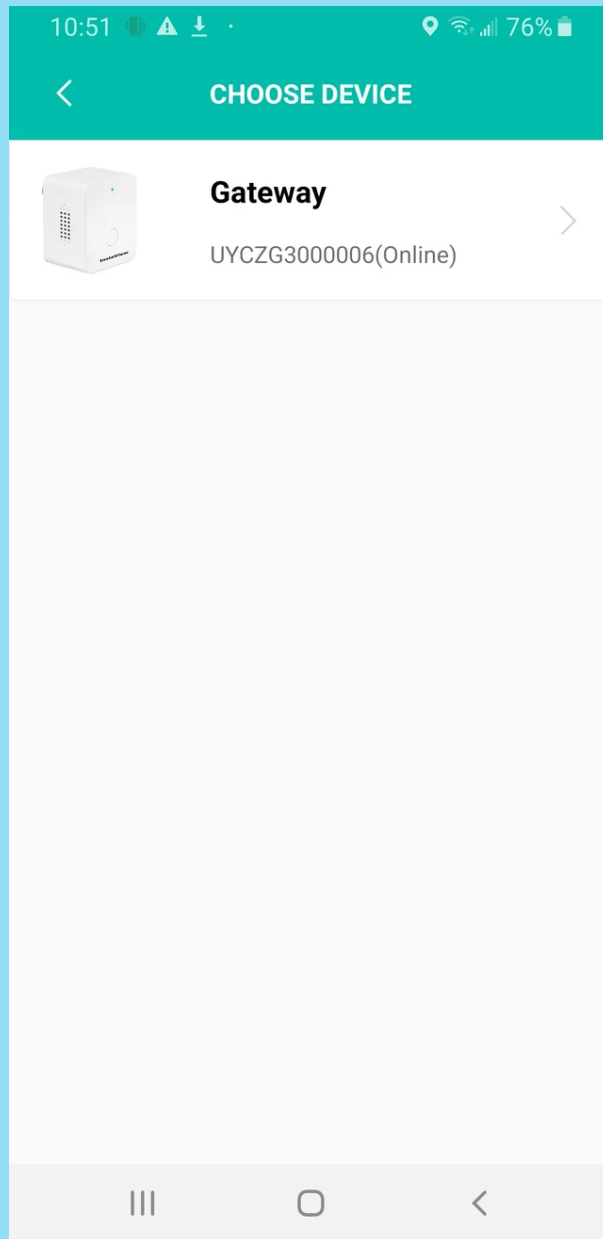

21. Choose a name or give your sensor a custom name.

10:51 76%

< NAME YOUR MAILBOX SENSOR




Name your mailbox sensor

MAILBOX

CUSTOM

22. Select 'Allow' to enable the phone's camera for scanning the QR code.

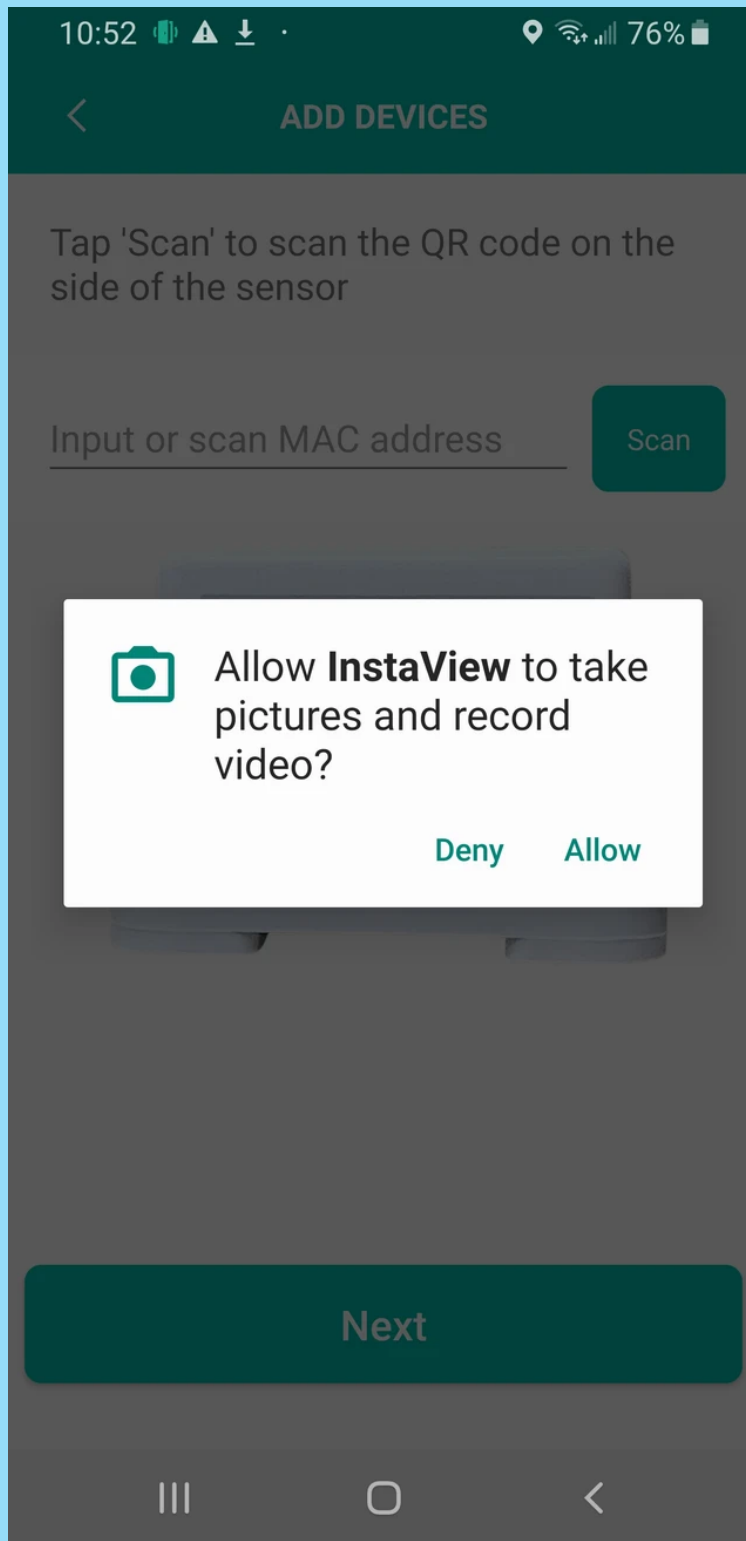

23. After the gateway is set up and plugged into the wall, press and hold the button for a few seconds (a long press);

you will hear, "Pairing mode is enabled."



24.

Press the button on the mailbox sensor; you will hear, "Mailbox sensor added."

8:57



9%



Install



Press the sensor button to hear 'Mailbox sensor added'.

25.

Continue from the above step, with the sensor stand placed on a table,

its LED facing downward and the InstaView logo positioned on top

(note that the print appears upside down). Press and hold the button for 3 seconds.

The LED will blink; then, **wait at least 14 seconds.**

8:57



9%



Install



Important:

Place the device on a flat surface, ensuring that the LED is at the bottom and the inverted "InstaView" logo is at the top (see image above).

Press and hold the button for 3 seconds, or until the LED begins blinking.

If the LED does not begin blinking, press and hold the button once more.

Is the LED currently blinking?

8:57



9%



Mailbox

Calibration is in progress;
countdown: 9 seconds.

26. Flip the mailbox sensor as shown in the picture below. You will hear "You have mail."

Once the sensor is calibrated, you can install it inside your mailbox.


8:57



9%



Install

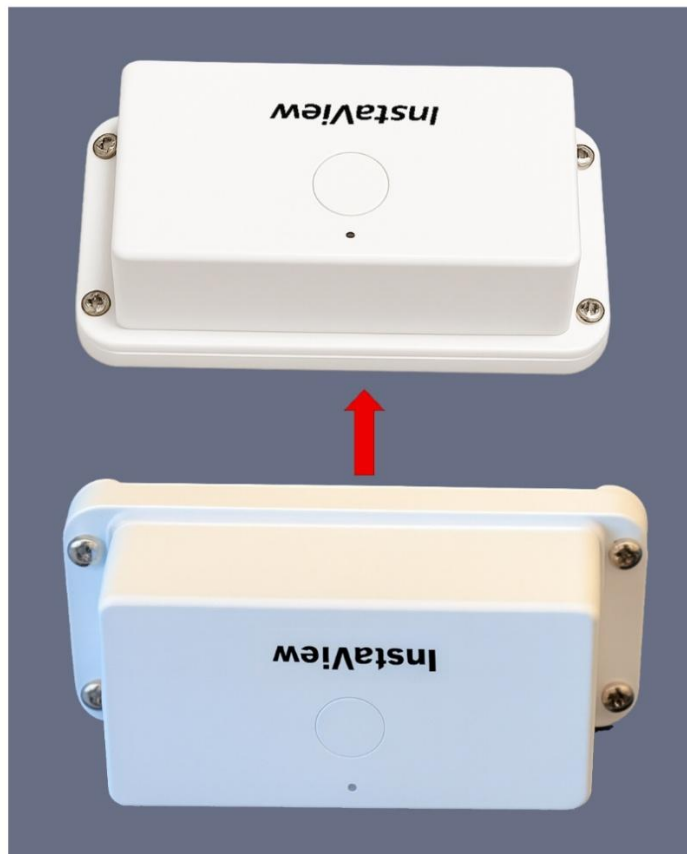

Tilt the sensor 90° as shown until it lies flat—you'll hear 'You have mail'.

27. Installed the mailbox sensor into your mailbox door

8:58



9%



Install



Use two Velcro strips to mount the sensor on the mailbox door.

The InstaView logo must face you in an upright position—not upside down (see image above).

**Please note that this is a new type of Velcro that does not distinguish
between male and female sides,
although both appear to be male.**

8:58



9%



Install



Press both ends of the sensor firmly so that the two Velcro strips fasten securely.

Please note that this is a new type of Velcro that does not distinguish between male and female sides, although both appear to be male.


28. After the door is closed, **wait** 4-5 seconds



The InstaView logo must be **upright**. Refer to the image below:



29. Open the mailbox cover to test if you receive a notification on your phone.

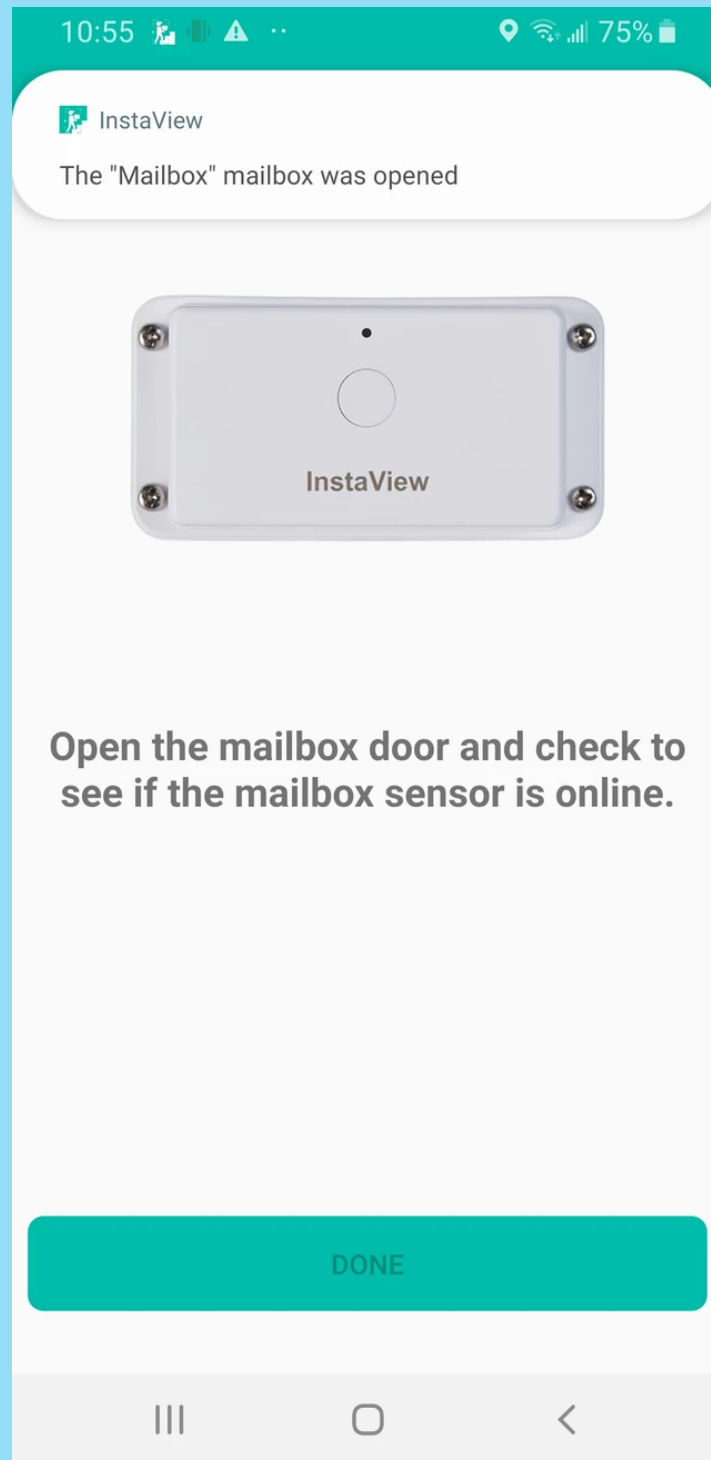

30. Mailbox sensor has been added.

10:55

75%



INSTALL




Device is added successfully


DONE




- 31.** When the mailbox is opened, the indoor siren will talk and a notification will appear on your phone.

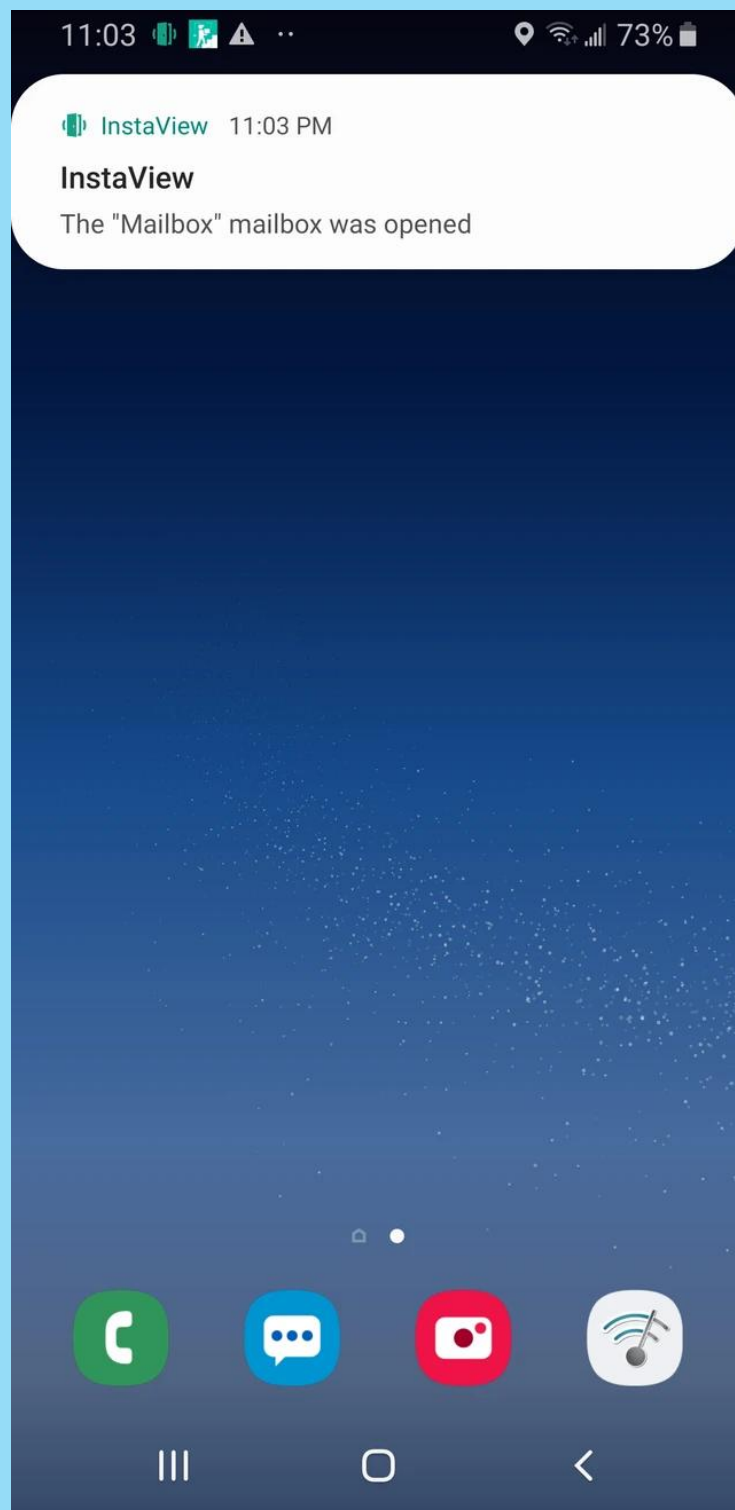

32. To set quiet hours, navigate to the 'Devices' screen, tap the gateway, select 'Quiet Hours,' and tap the '+' on the next page to set specific time periods for pausing notifications

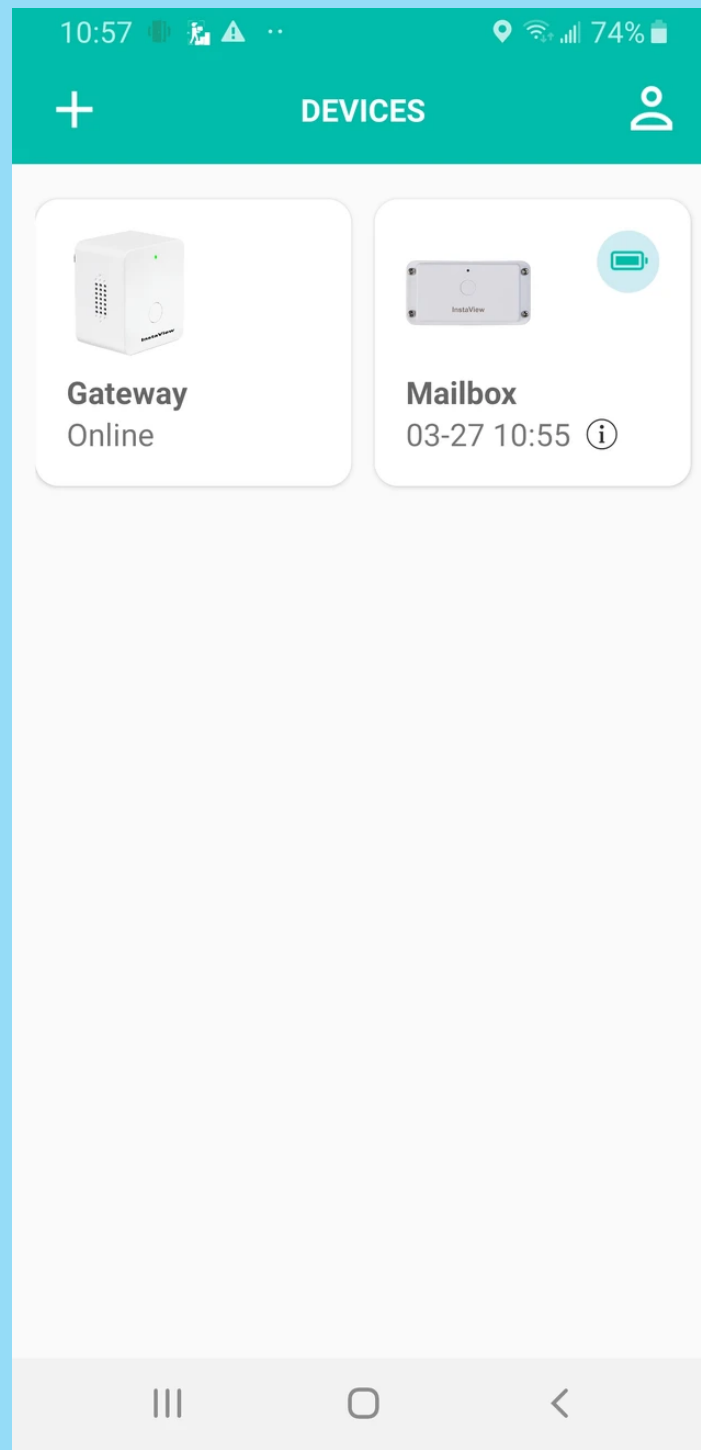

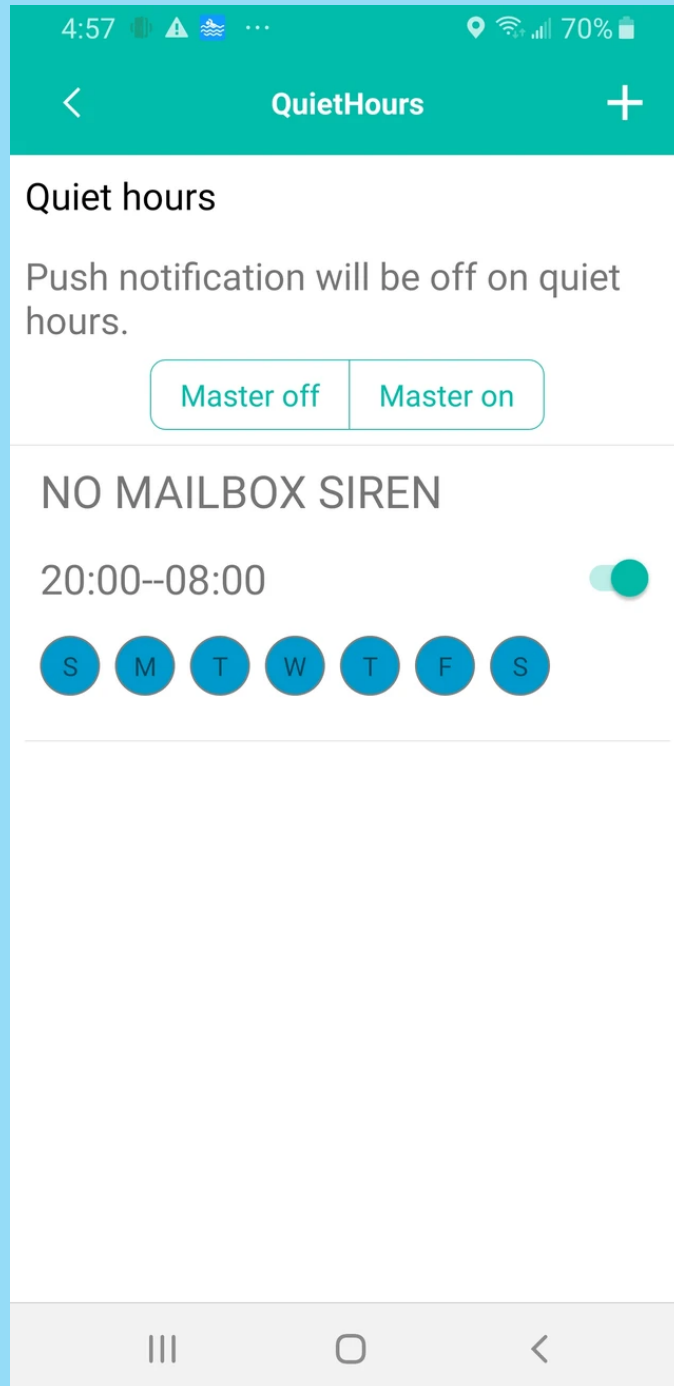

- 33.** Review the notification history as needed by tapping the mailbox sensor on the “Devices” screen.



During setup, whenever you are asked for a choice, choose **Yes** or **Allow** so it can go smoothly.

34. How to Share the Device on the InstaView App

There are two methods of sharing.

Method 1:

The first method is for all of your family members to use one account and password. The same account can be logged into on different smartphones, and all users will have the same level of access.


Method 2:

The second method involves each family member having a different email address, next are the steps.

The family member with whom you want to share the device must first have an account.


They will need to download the InstaViewSafe app to their phone and tap “Register” to create an account.

Please note: The family member does not need to set up the gateway again. The following are the detailed steps:

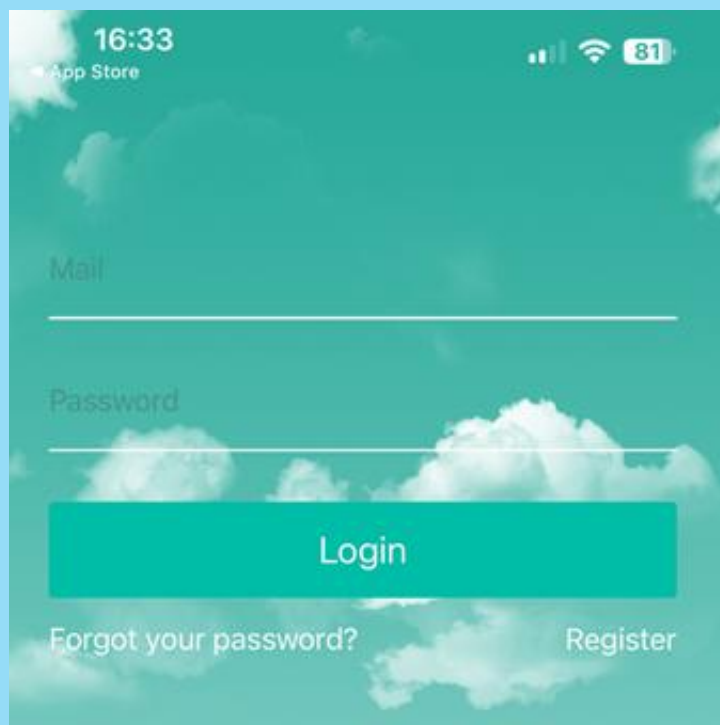


Step 1:

Before sharing, your Gateway and sensors (Mailbox or Thermometer) must be successfully set up. To get started, tap the top-right icon.

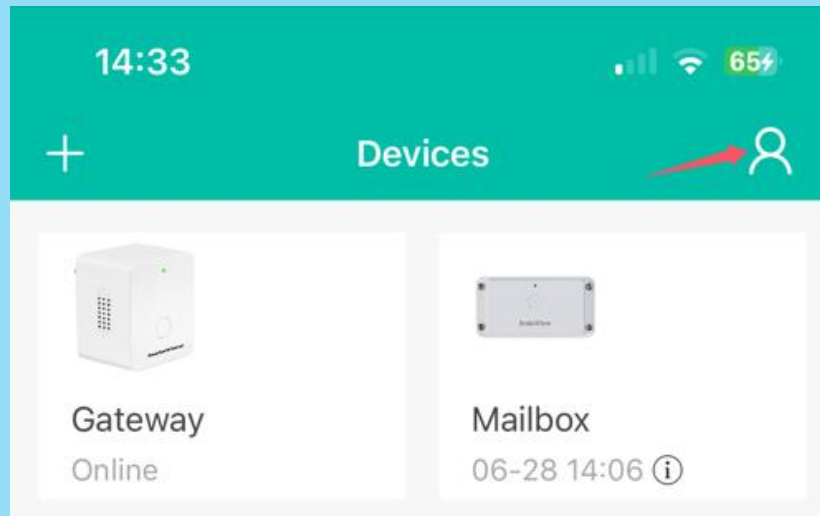


Step 2:

Select the “Share with Family” option from the menu.

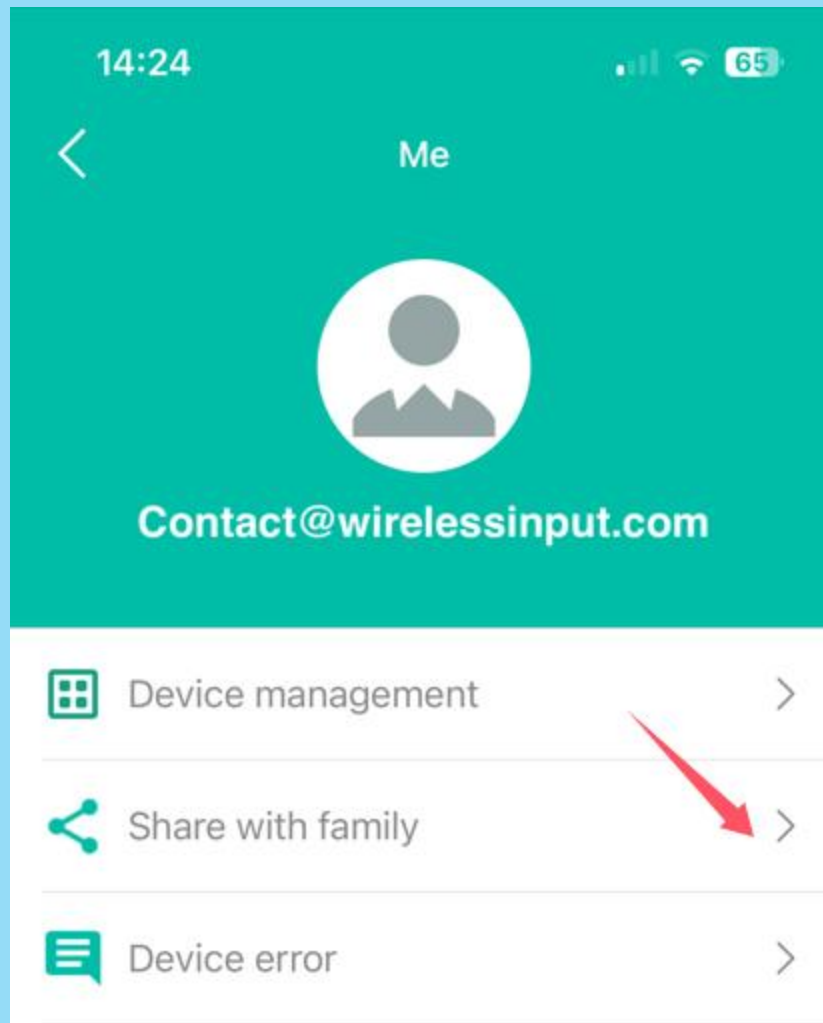


Step 3:

Tap the “+” icon.

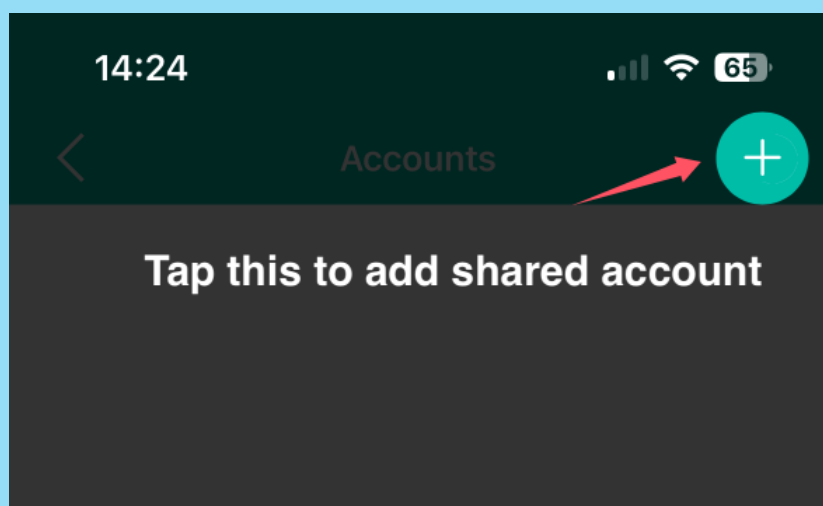


Step 4:

Select the gateway, and then tap “Next”.

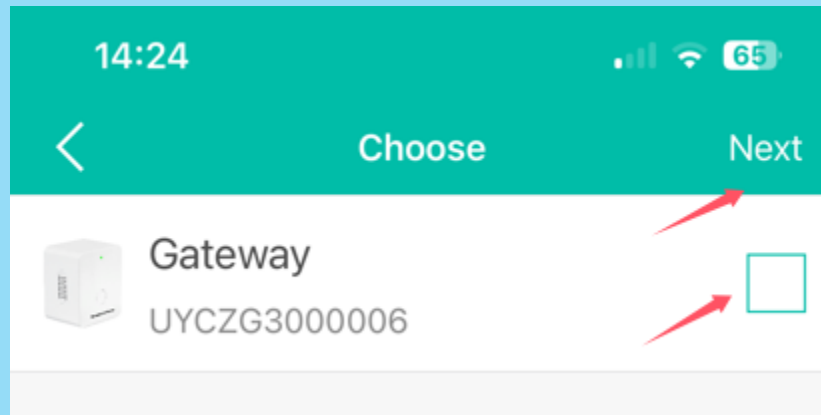

Step 5:


Enter the email address with which you can share access to the mailbox or other sensors. **Please note** Your family member must first register an account using their email on the **InstaViewSafe** app before you can share mailbox access with them.

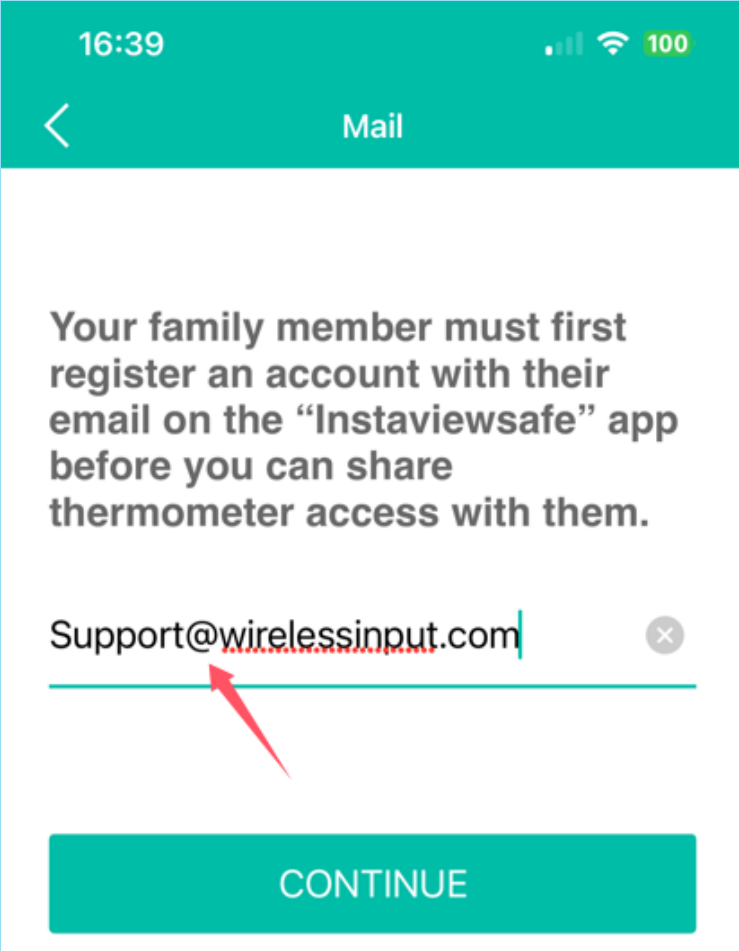

Step 6:


A verification code will be sent to the email address.

Retrieve the code and enter it here.

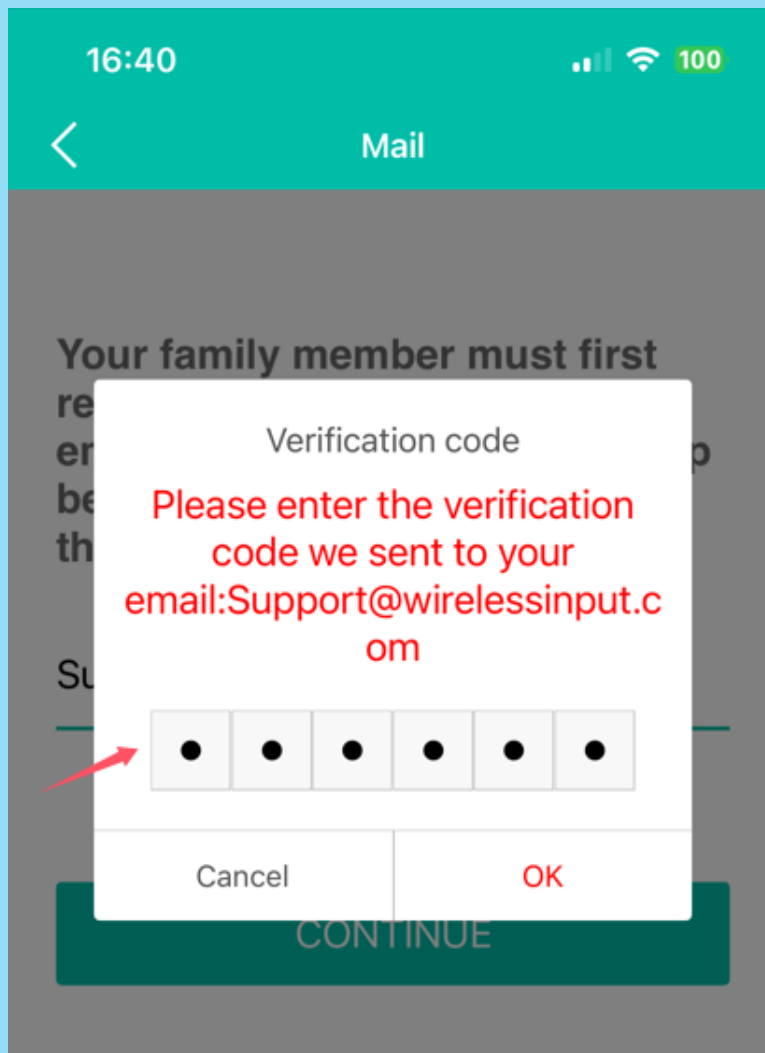

Step 7:

Sharing setup is complete. You can ask family members to use their email address to log in and access the devices.

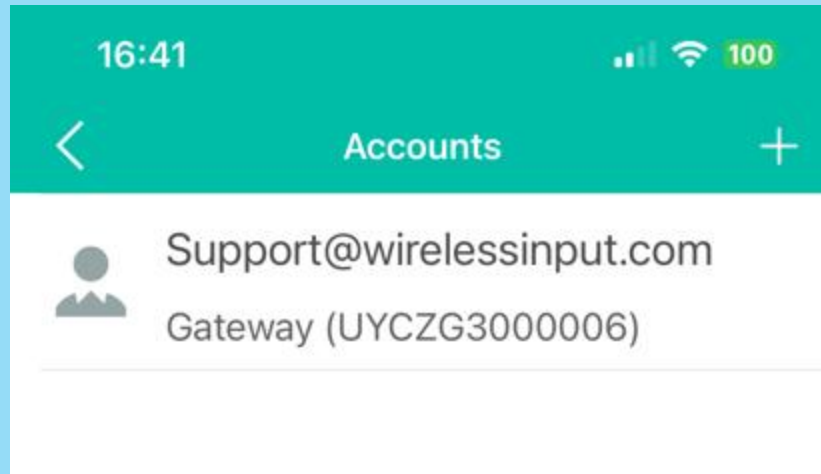

FQA

How to Contact Customer Service

If you need assistance, you can contact support at support@wirelessinput.com.

Please allow 24 to 48 hours for a response.

When to Reset the Gateway?

A reset may be necessary if:

1. Your Wi-Fi password has changed, or
2. You want to register a new account with a different login email, or
3. The gateway does not speak when plugged into a wall outlet for the first time.

To reset it, use a SIM card ejector pin or a thin needle. Insert it into the small hole on one side of the gateway, then press and hold for 6 seconds.

The gateway will speak and confirm that it has been reset successfully.



My sensor no longer triggers voice or push notifications. What should I do?

In this case, recalibrating the sensor is recommended.
Please refer to **section 23**, “Mailbox Sensor Adding/Calibration.”

How to Share Notifications with Family Members?

(Please refer to **section 30**: “How to Share the Device on the InstaView App”)